


SL 40 (50Hz)

No. of vanes 7	Capacity 7,2-12,0 m ³ /h
Outlet connection diameter (inside threaded) 2"	Delivery head 160 - 80 mt
Pump outside diameter 95 mm	Shaft diameter (Hexagonal) 11 mm




The hydraulic working characteristics have been taken with water at 15 °C, at the atmospheric pressure of 1 bar and specific gravity is 1 gr/cm³

Technical Specifications

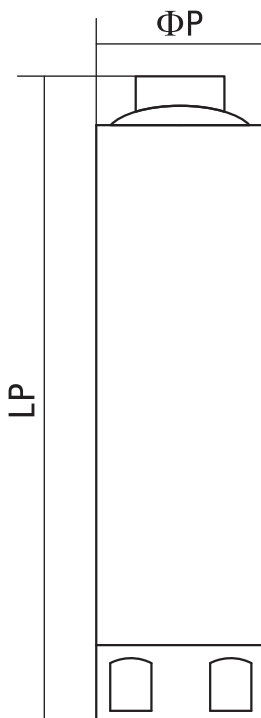

Diffuser : Noryl	Top Diffuser : Noryl
Impeller : Noryl	Pump shaft : Stainless steel (AISI 304)
Coupling : Stainless steel (AISI 304)	Suction case : Stainless steel (AISI 304)
Strainer : Stainless steel (AISI 304)	Top bracket : Stainless steel (AISI 304)
Valve cap : Stainless steel (AISI 304)	Rotation : CCW
Wear box : Stainless steel (AISI 304)	Revolution : 2.900 rpm



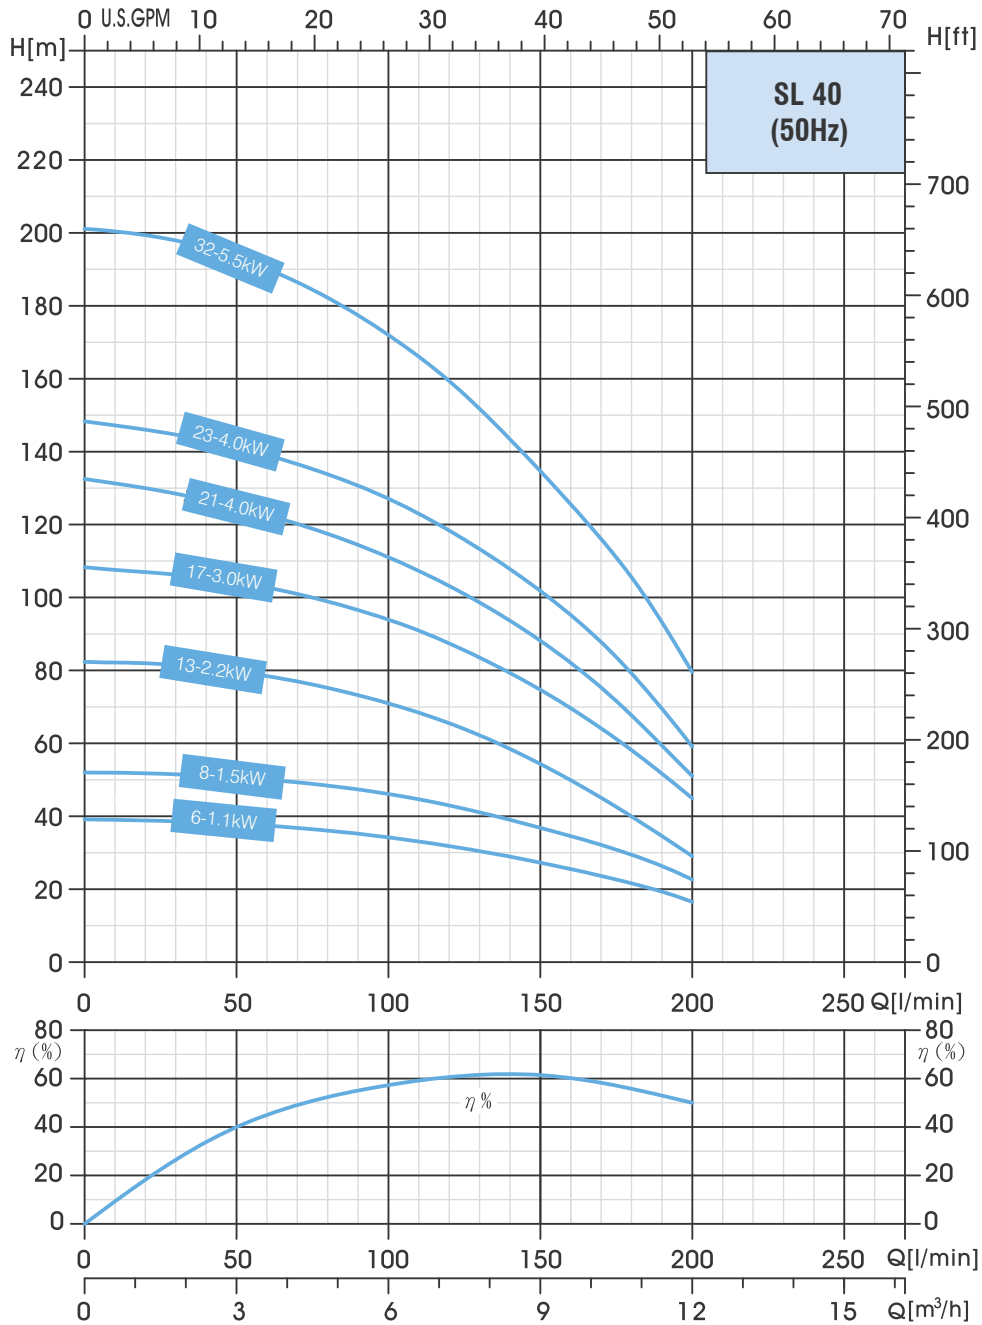

Dimensions and Performance Table

Type	Stages	Motor			Pump			m³/h	Head (m)						
		Type	kW	HP	L(mm)	DN (RPT or NPT)	Kg		0	7.2	7.8	8.4	9.0	9.6	12.0
								l/min	0	120	130	140	150	160	200
SL 40-6	6	4"	1.10	1.50	356	2"	3.4	Head (m)	39	32	30	29	27	26	18
SL 40-8	8	4"	1.50	2.00	418	2"	4.0		52	43	40	39	37	35	24
SL 40-13	13	4"	2.20	3.00	573	2"	5.5		82	66	62	59	53	50	30
SL 40-17	17	4"	3.00	4.00	697	2"	6.6		108	87	83	79	75	70	47
SL 40-21	21	4"	4.00	5.50	859	2"	7.8		132	103	98	93	88	82	52
SL 40-23	23	4"	4.00	5.50	921	2"	8.4		148	118	113	108	101	95	60
SL 40-32	32	4"	5.50	7.50	1.238	2"	11.0		202	160	151	143	133	125	80